




## TELEMETRY FOR 200l / 60l OIL DRUMS

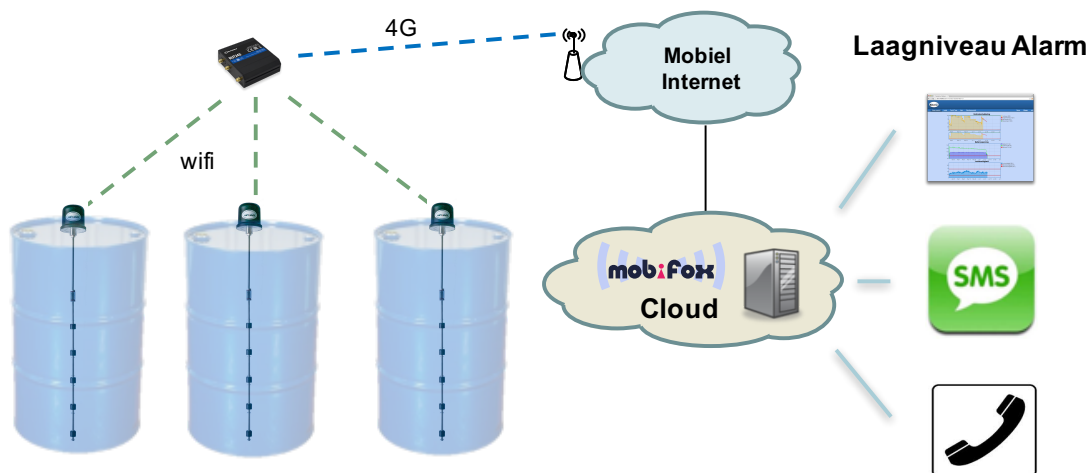

This unique MobiFlex level sensor can easily be mounted in the small (3/4 ") opening of a 200l or 60l oil drum. The MobiFlex is wirelessly connected to a central Mobifox Gateway. The Gateway collects all measured levels and sends it over 4G to the MobiFox Cloud. This Cloud server sends alarm messages when the level in the tank reaches a set alarm level. The sensor can be extended up to 3m.

Specifications	MobiFlex	Gateway
Maximum # level sensors	1	50
Plug 'n play installation	✓	✓
Outside useage	✓	-
Dial-in frequency	4x p day	4x p day
Voeding	5V DC	230V AC
Battery lifetime	2-4 jaar	-
Antenna	wifi	2/4G
Externe antenna (optional)	-	✓
LED indication	-	✓
Reset button	-	-
Magnet activation	✓	-
Power indication	✓	✓
Barometer	✓	-
Measure principe	Reed-contacts	nvt
Accuracy	100mm	nvt
Material	RVS en PE	Aluminium
Sensor length	max. 3m	nvt
ATEX	No	No
Fitting	3/4", 1,5" en 2"	nvt
Water proof	Splash proof	Splash proof
Size	122x90mm	120x100mm
Suitable for	Diesel, Lubricant, AdBlue, Water, etc	Diesel, Lubricant, AdBlue, Water, Chemicals, etc